



PLANT TUBE

防水フレキシブルチューブ H F Type

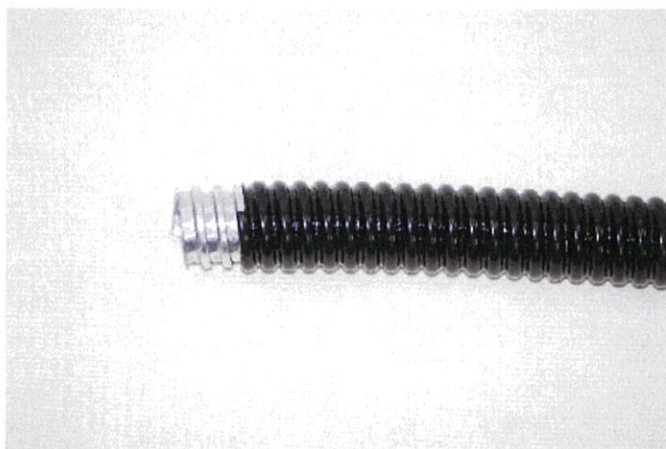

スクエアロックタイプ
SQUARE LOCK TYPE

商品詳細

特性 工作機械、一般配線用、難燃性、耐油性、耐候性、超柔軟タイプ
 対応温度 -25℃～+60℃
 標準色 黒

カタログNo. Catalog No.	サイズ Conduit Size		I.D. (mm)		O.D. (mm)		標準梱包 巻長さ Coil (m)	最小曲げ半径 Bend Radius (mm)
			Min	Max	Min	Max		
HF-10	13	3/8"	12.5	13.0	17.2	17.7	50	45.0
HF-11	16	1/2"	15.7	16.3	20.0	21.0	50	55.0
HF-12	22	3/4"	20.7	21.3	24.9	25.9	30	70.0
HF-13	28	1"	26.3	26.9	31.4	32.4	30	85.0
HF-14	36	1 1/4"	34.8	35.6	41.2	42.4	20	100.0
HF-15	42	1 1/2"	39.8	40.6	46.2	47.4	20	110.0
HF-16	54	2"	50.8	51.6	58.4	59.6	10	140.0
HF-17	70	2 1/2"	62.8	63.6	70.7	71.9	10	180.0
HF-18	82	3"	77.7	78.7	85.0	86.4	10	220.0